
MISCO
Accessories

DUAL VOLTAGE, 5 WATT TRANSFORMER
PART #: 5T2570

Model 5T2570 is a 5 watt line matching transformer for use in constant voltage sound reinforcement systems. This unit has dual voltage capability and has an insertion loss that does not exceed 1 dB with a frequency response of +/- 1.5 dB from 100 - 10KHz. The primary taps are 5, 2.5, 1, 0.5, and 0.25 watts. The secondary impedance is 8 ohms. See detailed specifications below.

- 5 Watt
- 25 & 70 Volt
- 8 Ohm Secondary Impedance
- 5, 2.5, 1, 0.5 0.25 Primary Taps
- +/- 1 dB from 100 - 10KHz Frequency Response

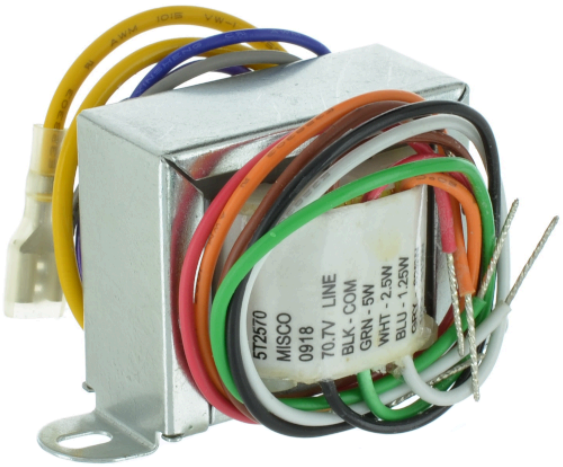

Primary Specifications

- **5 Watt**
- **25 & 70 Volt**
- **8 Ohm Secondary Impedance**
- **5, 2.5, 1, 0.5 0.25 Primary Taps**
- **+/- 1 dB from 100 - 10KHz Frequency Response**

1771 Energy Park Drive, Suite 400, St. Paul, Minnesota 55108 U.S.A. • Call: 612-825-1010 • Fax: 612-825-7010 • www.miscospeakers.com
©2026 MISCO/Minneapolis Speaker Company Inc.