

- 8" Ceiling Baffles
- Complete Pre-packed Speaker/Transformer/Baffle

MODEL 8PBL - Plastic




- White finish and natural contour edge
- Silicon treated for increased dispersion and reduced distortion
- Hidden speaker mounting stud
- High percentage of open area
- Comes complete with mounting hardware
- Excellent for high humidity applications with MISCO Waterproof Loudspeaker
- Can be used with industry standard mounting rings

MODEL 8WB - Steel



- Baked semi-gloss white enamel
- One piece construction to eliminate vibrations
- Mounts directly to ceiling or standard plaster ring
- Projects 1/4" from ceiling
- Comes complete with mounting hardware

MODEL	MATERIAL	BAFFLE DIAMETER	MOUNTING DIAMETER	SPEAKER ATTACHMENT	BAFFLE MOUNTING
8PBL	PLASTIC	13"	11.25"	STUD-MOUNT/NUT	1-1/2" SCREWS - STANDARD RINGS/ENCLOSURES
8WB	STEEL	13"	11.25"	STUD-MOUNT/NUT	1-1/2" SCREWS - STANDARD RINGS/ENCLOSURES

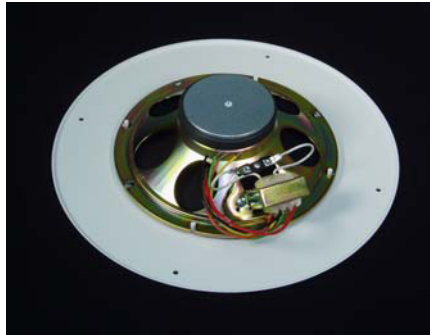

COMPLETE PACKAGES - Available for any MISCO 8" speaker, transformer, or baffle.

- Saves time, labor, and material costs
- Individually boxed and packed 5 units per master pack
- 25 or 70 volt transformers

8" COMMERCIAL SOUND PRODUCTS COMPLETE PACKAGES

MODEL ¹	SIZE / SHAPE	SPEAKER APPLICATION	MAGNET WEIGHT OUNCES	SPEAKER TYPE	DEPTH TOTAL INCHES	MAX XFMR POWER ²	TRANSFORMER VOLTAGE ¹	FREQUENCY RESONANT HZ	FREQUENCY RANGE HZ	SENSITIVITY AVERAGE 500 - 2.5 kHz 1WATT.METER dB SPL
FC8PA-4T70-8PBL	8" RD	PAGING	5	SINGLE CONE	2.7	4	70	95	55 - 13 kHz	95
FC8PA-4T70-8WB	8" RD	PAGING	5	SINGLE CONE	2.7	4	70	95	55 - 13 kHz	95
JC8PAD-4T70-8PBL	8" RD	VOICE & MUSIC	10	MOISTURE TREATED PAPER AND DUAL CONE	3	4	70	90	40 - 16 kHz	97
JC8PA-4T70-PBL	8" RD	VOICE & MUSIC	10	SINGLE CONE	2.8	4	70	90	40 - 14 kHz	97
JC8PA-4T70-8WB	8" RD	VOICE & MUSIC	10	SINGLE CONE	2.8	4	70	90	40 - 14 kHz	97
JC80PA-4T70-8PBL	8" RD	FULL RANGE MUSIC	10	COAXIAL	2.8	4	70	85	45 - 18 kHz	97
JC80PA-4T70-8WB	8" RD	FULL RANGE MUSIC	10	COAXIAL	2.8	4	70	85	45 - 18 kHz	97
JC80PA-8HT70-8WB	8" RD	FULL RANGE MUSIC	10	COAXIAL	2.8	8	70	85	45 - 18 kHz	97

¹ 4T25 specifies a 25 volt transformer.

² 4 Watt transformers have 4, 2, 1, .5, and .25 taps. 8 Watt transformers have 8, 4, 2, and 1 taps.

LOUDSPEAKERS AND RELATED PRODUCTS

MISCO/MINNEAPOLIS LOUDSPEAKER CO., INC. 2637 32nd AVENUE SOUTH / MINNEAPOLIS, MN 55406-1641 U.S.A.
Call (612) 825-1010 / Fax (612) 825-7010 / www.miscospeakers.com

Innovative Loudspeaker Solutions

Designed & Made in U.S.A.