
MISCO
Accessories

4 WATT, 25 VOLT LINE MATCHING TRANSFORMER
PART #: 4T25

Model 4T25 is a 4 watt line matching transformer for use in constant voltage sound reinforcement systems. This unit features an insertion loss that does not exceed 1 dB with a frequency response of +/- 1.5 dB from 100 - 10KHz. The primary taps are 4, 2, 1, 0.5, and 0.25 watts. The secondary impedance is 8 ohms. Model 4T25 is designed for 25 volt lines. See detailed specifications below.

- 4 Watt
- 25 Volt
- 8 Ohm Secondary
- 4, 2, 1, 0.5, 0.25 Primary Taps
- +/- 1.5 dB from 100 - 10KHz Frequency Response

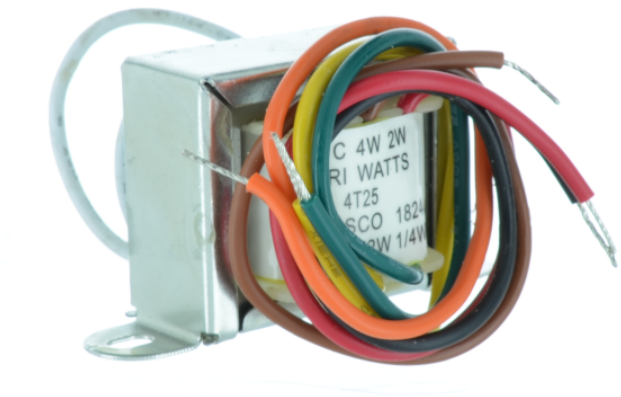

Primary Specifications

- **4 Watt**
- **25 Volt**
- **8 Ohm Secondary**
- **4, 2, 1, 0.5, 0.25 Primary Taps**
- **+/- 1.5 dB from 100 - 10KHz Frequency Response**

©2026 MISCO/Minneapolis Speaker Company Inc.