


Specification Sheet

Model # N9870-WP

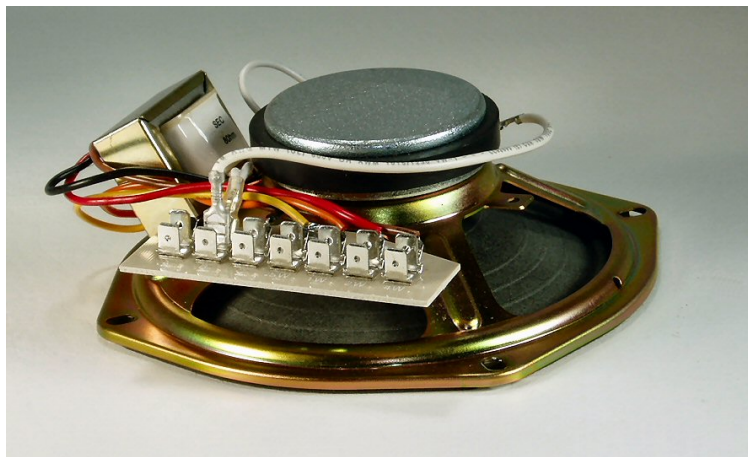

MISCO
Minneapolis Speaker Company

Key Features:

- 6" (156mm), 8 ohm
- Voice Range, 12 watts
- Ferrite magnet, black acrylic treated cloth cone with pre-treated black cloth surround;

Product Specifications & Parameters

Primary Specifications

Speakers Environment	Outdoor
RoHS Compliant	No

Technical Specifications

		Units of Measure
Nominal Basket Diameter	6.0	inch
	156.0	mm
Rated Impedance	8	ohms
Rated Power	12	Watts
Program Power	24	Watts
Frequency Range	100 - 8000	Hz
Sensitivity (2.83 V input measured at 1 Meter)	92	dB SPL
Voice Coil Diameter	0.8 / 20.3	inch / mm
Magnet Weight	4.8 / 136	oz / gr


Small Signal Parameters

	Units of Measure
Resonant Frequency (fo)	170 Hz
D.C. Resistance (Re)	6.0 ohms
Mechanical Q (Qms)	7.9
Electrical Q (Qes)	3.73
Total Q (Qts)	2.53
Compliance Equivalent Volume (Vas)	ltr
BL Product (BL)	T-M
Maximum Linear Excursion (Xmax)	0.3 mm
Surface Area of Cone (Sd)	cm ²

Material Descriptions

Basket	Stamped Steel
Terminal Size	0.19 X 0.02
Magnet	Ferrite
Voice Coil Wire	Copper
Voice Coil Form	Aluminum
Cone	Black Acrylic Treated Cloth
Cone Edge	Pre-treated Black Cloth
Dust Cap	Cloth

Sensitivity / Frequency

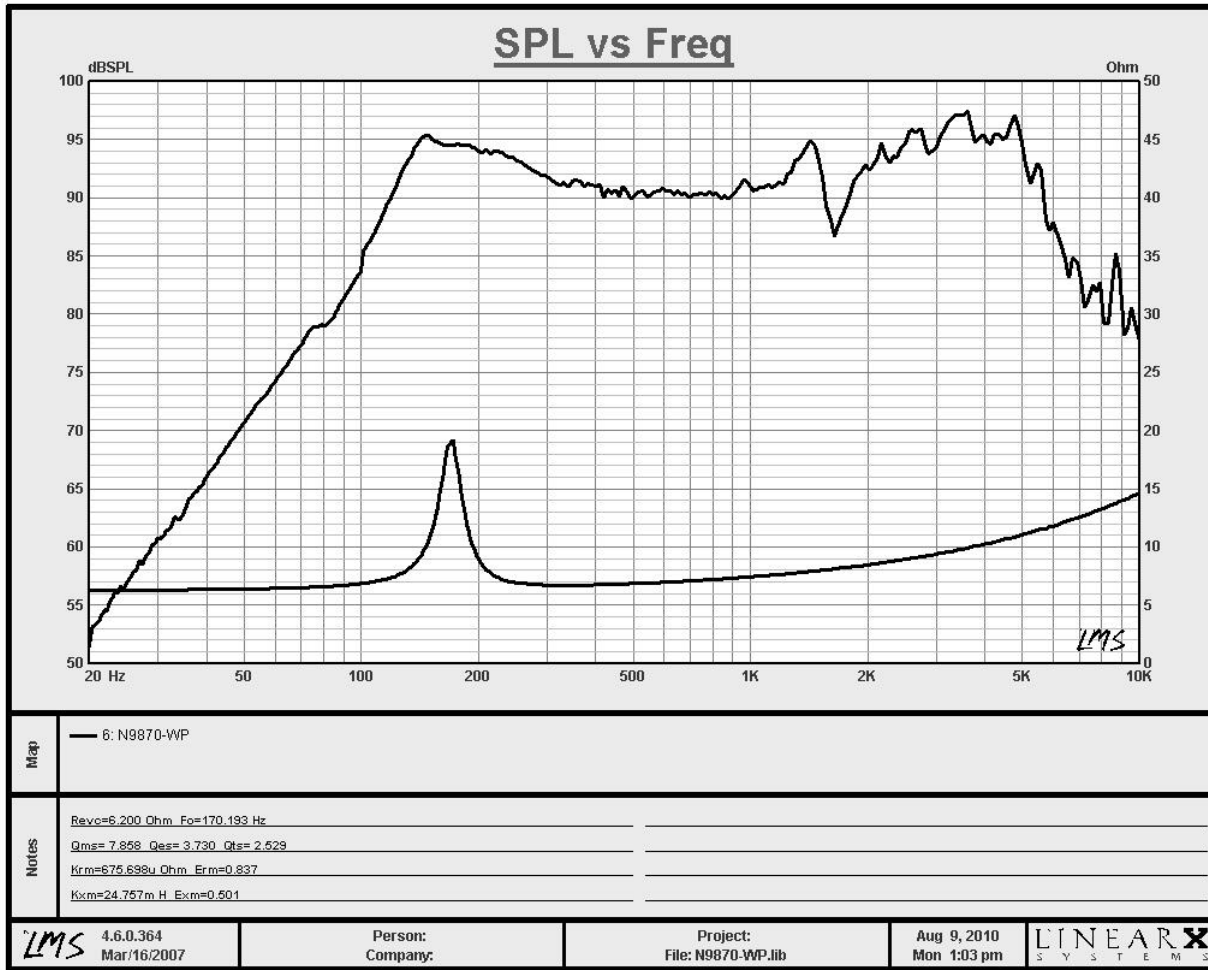

Drawing

ID	Description	Measurements	Tolerance
Od	Outside Diameter	6.2 in.	+/- 0.020"
CD	Cutout Diameter	5.6 in.	+/- 0.020"
MG	Magnet Diameter	2.8 in.	+/- 0.050"
HD	Hole Diameter	0.3 in.	+/- 0.010"
MD	Mounting Diameter	6.2 in.	+/- 0.010"
ID	Internal Depth	2.0 in.	+/- 0.025"
FT	Flange Thickness	0.13 in.	+/- 0.050"
NW	Net Weight	720.0 g	

