

Specification Sheet

Model # KC62WF-8A



MISCO®

Key Features:

- 6.5" (165mm), 8 ohm
- Mid Bass Woofer, 25 watts
- Ferrite magnet, black talc filled polypropylene cone with polyether foam surround;

Product Specifications & Parameters

Primary Specifications

Speakers Environment	Indoor
RoHS Compliant	No

Technical Specifications

		Units of Measure
Nominal Basket Diameter	6.5	inch
	165.0	mm
Rated Impedance	8	ohms
Rated Power	25.0	Watts
Program Power	50	Watts
Frequency Range	30 - 5000	Hz
Sensitivity (2.83 V input measured at 1 Meter)	88	dB SPL
Voice Coil Diameter	1.0 / 25.4	inch / mm
Magnet Weight	12.0 / 341	oz / gr
Transformer		


Small Signal Parameters

		Units of Measure
Resonant Frequency (fo)	37	Hz
D.C. Resistance (Re)	6.7	ohms
Mechanical Q (Qms)	11.5	
Electrical Q (Qes)	0.534	
Total Q (Qts)	0.51	
Compliance Equivalent Volume (Vas)	22.4	ltr
BL Product (BL)	6.6	T-M
Maximum Linear Excursion (Xmax)	4.4	mm
Surface Area of Cone (Sd)	113.0	cm ²
Moving Mass (Mmd)		g

Material Descriptions

Basket	Stamped Steel
Terminal Size	0.205 x 0.02
Magnet	Ferrite
Voice Coil Wire	Copper
Voice Coil Form	Kapton
Cone	Black Talc Filled Polypropylene
Cone Edge	Polyether Foam
Dust Cap	Cloth

Sensitivity / Frequency

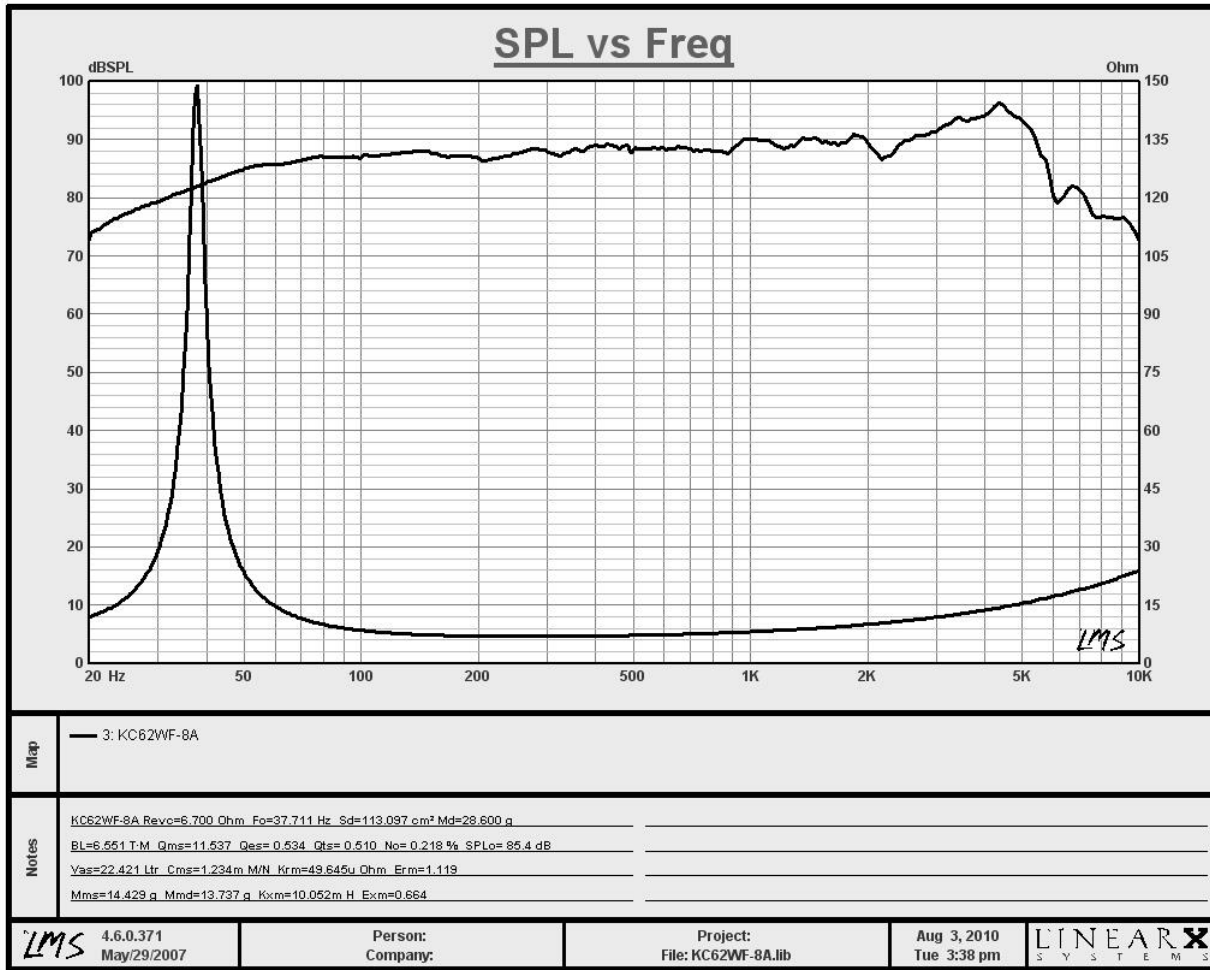

Drawing

ID	Description	Measurements	Tolerance
Od	Outside Diameter	6.6 in.	+/- 0.020"
CD	Cutout Diameter	5.6 in.	+/- 0.020"
MG	Magnet Diameter	3.4 in.	+/- 0.050"
HD	Hole Diameter	0.3 in.	+/- 0.010"
MD	Mounting Diameter	6.1 in.	+/- 0.010"
ID	Internal Depth	2.6 in.	+/- 0.025"
FT	Flange Thickness	0.19 in.	+/- 0.050"
NW	Net Weight	1083.0 g	

