

# **Specification Sheet**

Model # DC3WP-45





#### **Key Features:**

- 3" (77mm), 45 ohm
- Voice Range, 6 watts
- Ferrite magnet, red acrylic treated cloth cone;

### **Product Specifications & Parameters**

#### **Primary Specifications**

Speakers Environment	Outdoor
RoHS Compliant	No

#### **Technical Specifications**

		Units of Measure
Nominal Basket Diameter	3.0	inch
	77.0	mm
Rated Impedance	45	ohms
Rated Power	6.0	Watts
Program Power	12	Watts
Frequency Range	250 - 7000	Hz
Sensitivity (2.83 V input measured at 1 Meter)	87	dB SPL
Voice Coil Diameter	0.7 / 17.8	inch / mm
Magnet Weight	2.4 / 68	oz / gr
Transformer		


#### **Small Signal Parameters**

		Units of Measure
Resonant Frequency (fo)	300	Hz
D.C. Resistance (Re)	35.0	ohms
Mechanical Q (Qms)	8.7	
Electrical Q (Qes)	1.9	
Total Q (Qts)	1.59	
Compliance Equivalent Volume (Vas)		ltr
BL Product (BL)		T-M
Maximum Linear Excursion (Xmax)	1.1	mm
Surface Area of Cone (Sd)		cm2
Moving Mass (Mmd)		g

#### **Material Descriptions**

Basket	Stamped Steel
Terminal Size	0.19 X 0.02
Magnet	Ferrite
Voice Coil Wire	Copper
Voice Coil Form	Aluminum
Cone	Red Acrylic Treated Cloth
Cone Edge	Red Acrylic Treated Cloth
Dust Cap	Felt

## **Sensitivity / Frequency**

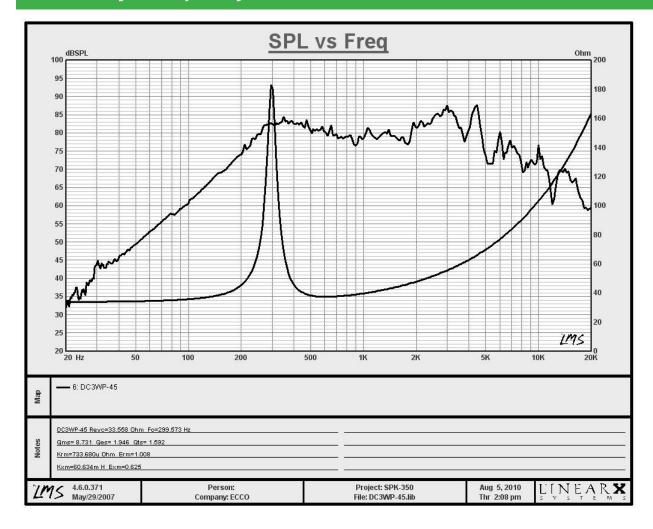

## **Drawing**

ID	Description	Measurements	Tolerance
Od	Outside Diameter	3.0 in.	+/- 0.020"
CD	Cutout Diameter	2.8 in.	+/- 0.020"
MG	Magnet Diameter	2.1 in.	+/- 0.050"
HD	Hole Diameter	0.2 in.	+/- 0.010"
MD	Mounting Diameter	3.4 in.	+/- 0.010"
ID	Internal Depth	1.1 in.	+/- 0.025"
FT	Flange Thickness	0.1 in.	+/- 0.050"
NW	Net Weight	217.0 g	

