


The AX-1364-M is a 6" integrated transit speaker, 70 volt transformer, and bushed aluminum grille specially designed for railcar applications. This model's custom mounted terminal strip allows multiple connection methods to best fit a system's electrical configuration.

- Voice range speaker
- 6" (152 mm) basket diameter
- 12 watts, 8 ohm
- 70 watt transformer, taps 1, 2, and 4 watts
- Ferrite magnet, acrylic treated paper cone
- Bushed aluminum grille

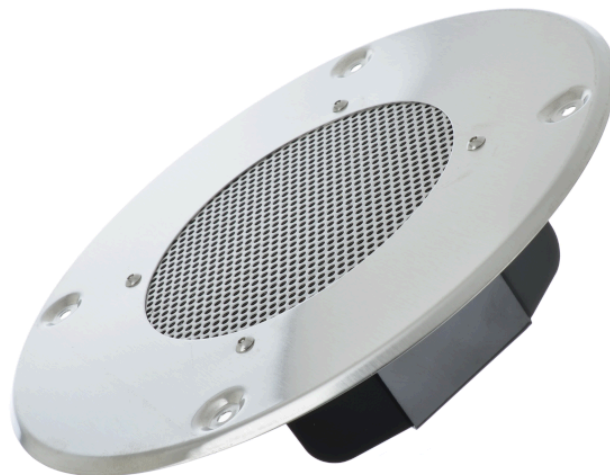

Primary Specifications

Size, Nominal (inch & mm)	6" (152 mm)
Rated Impedance (Ω)	8
Frequency Range (Hz)	80 - 8, 500
Resonant Frequency (Fs) (Hz) +/- 15%	120

More Specifications

Application	Indoor, Transit, Voice Communications
RoHS Compliant	No
DC Resistance (Re) (Ω)	8
Program Power (W)	12

Small Signal Parameters

Nominal Impedance (Z) (Ω)	8
DC Resistance (Re) (Ω)	8
Resonant Frequency (Fs) (Hz) +/- 15%	120
Total Q Factor (Qts)	1.50

Material Descriptions

Basket Type	Stamped steel
Magnet Material	Ferrite
Magnet Weight (g)	136.08
Cone Body Material	Treated paper
Cone Surround Material	Treated cloth

