

THIS IS A "BUILT TO ORDER" PRODUCT

REQUEST A QUOTE


This is a super thin specialty application speaker for use in either outdoor or indoor applications. This speaker was designed for high-performance, clear speech. The single-piece polyester cone makes a great water and dust barrier for IP 65 applications. Ideal for small, very thin, hand held communication devices for outdoor use. It also performs well for reproducing alarm tones for medical or point-of-sale equipment.

- Voice range speaker
- 1.5" (40 mm) diameter
- 1 watt, 8 ohms, 81 dB SPL
- 0.6" copper voice coil, paper former
- Neodymium magnet, stamped steel frame
- Polyester cone, PET surround



Primary Specifications

Size, Nominal (inch & mm)	1.6" (41 mm)
Rated Impedance (Ω)	8
Sensitivity (dB SPL) ¹	81
Frequency Range (Hz)	350 - 6,000
Resonant Frequency (Fs) (Hz)	660

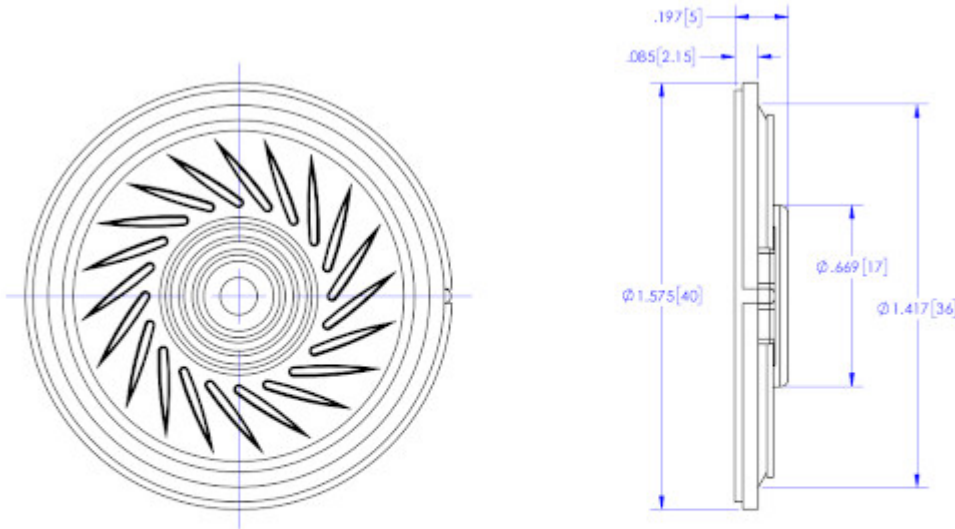

More Specifications

Application	Medical, Military, Signal / Alarm Systems, Voice Communications
RoHS Compliant	Yes
DC Resistance (Re) (Ω)	7.6
Program Power (W)	2


Small Signal Parameters

Nominal Impedance (Z) (Ω)	8
DC Resistance (Re) (Ω)	7.6
Voice Coil Inductance (Le) (mH)	0
Resonant Frequency (Fs) (Hz)	660
Mechanical Q Factor (Qms)	3.7
Electrical Q Factor (Qes)	9.66
Total Q Factor (Qts)	2.68

Material Descriptions

Basket Type	Zinc plated stamped steel
Terminal Size (mm)	Solder pads
Voice Coil Diameter (mm)	15.2
Voice Coil Wire Material	Copper
Voice Coil Former Material	Paper
Magnet Material	Neodymium
Magnet Weight (gm)	3.0
Cone Body Material	Polyester
Cone Surround Material	Single piece of polyester film
Dust Cap Material	Incorporated in cone



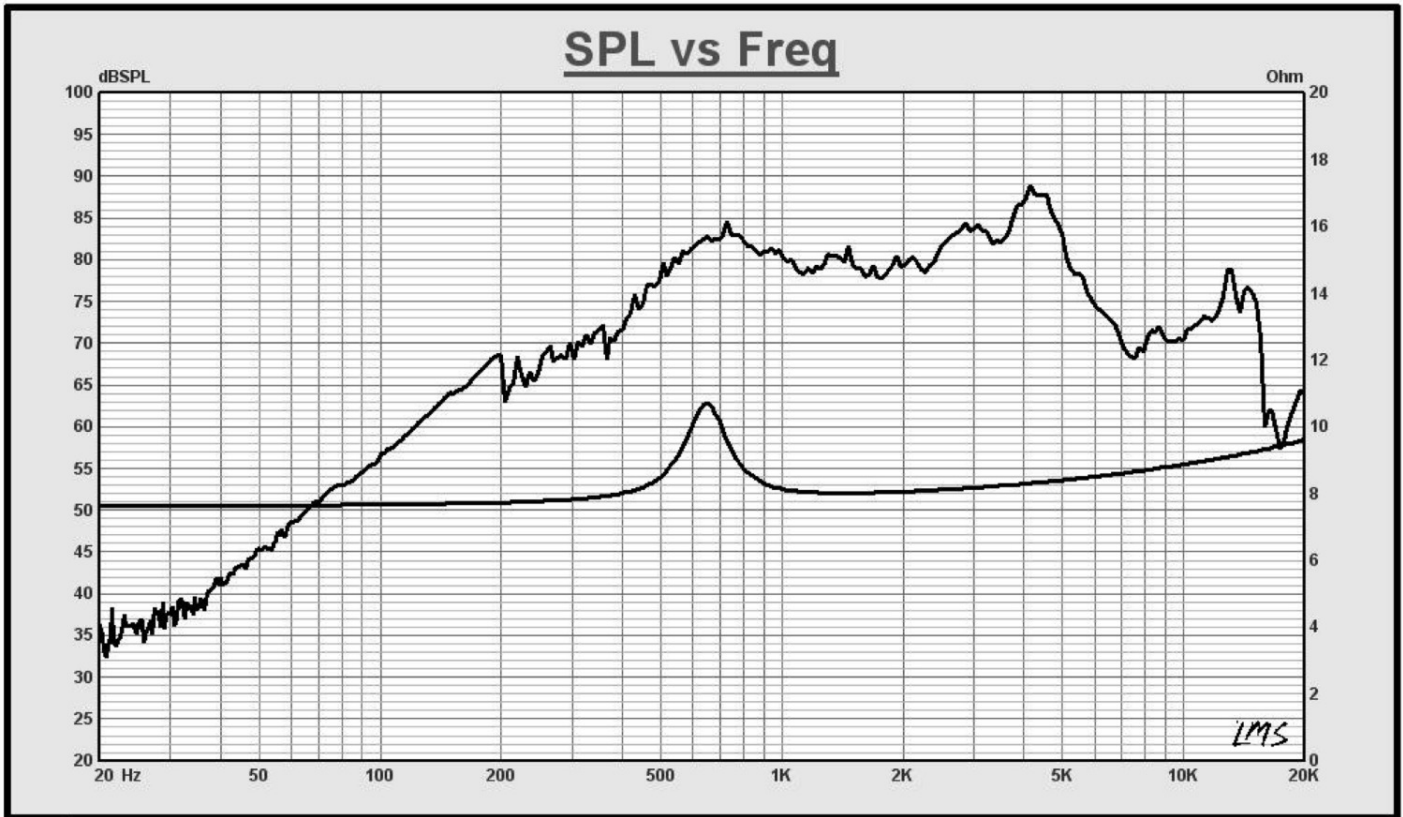

Map	— 17: 40RN08M-1		
Notes	40RN08M-1 Revc=7.600 Ohm Fo=649.488 Hz		
	Qms= 3.649 Qes= 9.496 Qts= 2.636		
	Kfm=906.909u Ohm Erm=0.652		
	Kxm=5.797m H Exm=0.463		
LMS	4.6.0.371 May/29/2007	Person: Company:	Project: File: 40RN08M-1.lib
			Aug 4, 2010 Wed 1:19 pm
			LINEAR X S Y S T E M S