MISCO Amplifiers

MODEL #: MA-2107

2.1 CHANNEL, 60W, PCB STYLE AMPLIFIER WITH DSP

PART #: 93110

The 93110 is an economical 20-watt, class-D, 2.1 channel amplifier with a digital input for noise reduction. This versatile amp delivers the punch for your sound systems, digital signage, and more!

Key Features:

- 2.1 channel, class-D
- 60-watt, PCB style
- Ideal for internal design
- Noise reduction digital input

*Power output varies with supply voltage and speaker impedance. See specs table for details.

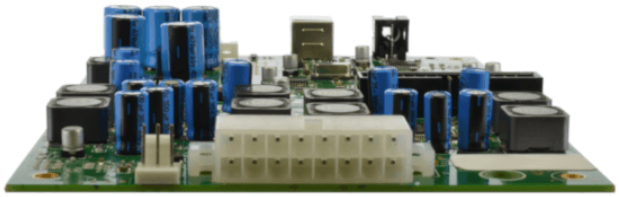

Primary Specifications

Amplifier Style	Printed Circuit Board
Amplifier Channels	2.1
Watts Per Channel (HF/LF) (W)	20 x 2 / 20
Digital Signal Processing	Yes
PSU Voltage Range	24
Audio Input	USB, S/PDIF Coax

1771 Energy Park Drive, Suite 400, St. Paul, Minnesota 55108 U.S.A. • Call: 612-825-1010 • Fax: 612-825-7010 • www.miscospeakers.com
©2024 MISCO/Minneapolis Speaker Company Inc.

MISCO Amplifiers

MODEL #: MA-2107

2.1 CHANNEL, 60W, PCB STYLE AMPLIFIER WITH DSP

PART #: 93110

Primary Specifications

Digital Signal Processor Specifications

Dimensions & Weight

PCB Size (HxWxL) (mm)	108 x 163

Power Supply Specifications

1771 Energy Park Drive, Suite 400, St. Paul, Minnesota 55108 U.S.A. • Call: 612-825-1010 • Fax: 612-825-7010 • www.miscospeakers.com
©2024 MISCO/Minneapolis Speaker Company Inc.