MISCO Amplifiers

MODEL #: MA-2108

2.1 CHANNEL, 52W, PCB STYLE AMPLIFIER WITH DSP


PART #: 93115

The 93115 is a 50-watt, small form-factor amplifier with DSP. This includes a 5-band EQ with crossovers and volume offsets. For easy access, one connector links to speaker outputs, analog line-in, and input power.

Key Features:

- 2.1 channel, class-D
- Analog, USB, and S/PDIF inputs
- Small form-factor amplifier with DSP
- 5-band EQ

*Power output varies with supply voltage and speaker impedance. See specs table for details.

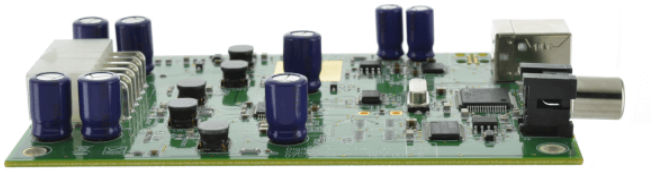

Primary Specifications

Amplifier Style	Printed Circuit Board
Amplifier Channels	2.1
Watts Per Channel (HF/LF) (W)	13 x 2 / 25
Digital Signal Processing	Yes
Audio Input	USB, S/PDIF, anlog

1771 Energy Park Drive, Suite 400, St. Paul, Minnesota 55108 U.S.A. • Call: 612-825-1010 • Fax: 612-825-7010 • www.miscospeakers.com
©2026 MISCO/Minneapolis Speaker Company Inc.

MISCO Amplifiers

MODEL #: MA-2108

2.1 CHANNEL, 52W, PCB STYLE AMPLIFIER WITH DSP

PART #: 93115

Primary Specifications

Digital Signal Processor Specifications

Dimensions & Weight

PCB Size (HxWxL) (mm)	70 x 108

Power Supply Specifications





1771 Energy Park Drive, Suite 400, St. Paul, Minnesota 55108 U.S.A. • Call: 612-825-1010 • Fax: 612-825-7010 • www.miscospeakers.com
©2026 MISCO/Minneapolis Speaker Company Inc.