

# MISCO. Amplifiers


MODEL #: MA-2001  
**2 CHANNEL, 25W, PCB STYLE AMPLIFIER WITH  
VOLUME CONTROL**  
PART #: 93101

The MISCO 93101 amplifier is a small two-channel device with a 2.25" x 2.5" board that easily mounts into tight spaces. It delivers up to 12.5 WPC\*, and accepts a power supply input range of 9 to 24VDC, allowing for existing power rails or an external MISCO power supply [sold separately](#). The MA-2001's built-in gain control permits easy volume adjustment.

## Key Features

- Up to 25W power output\*
- Cool running, reliable Class-D operation
- Volume control
- Wide 9-24VDC voltage input range
- 3.5mm stereo and board-mounted inputs

\*Power output varies with supply voltage and speaker impedance. See specs table for details.

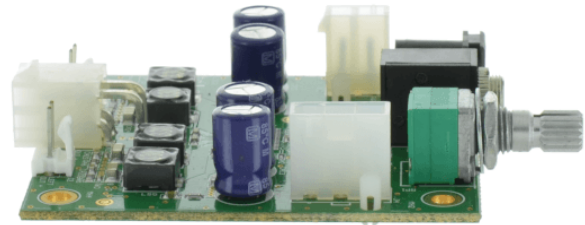

## Primary Specifications

<b>Amplifier Style</b>	Printed Circuit Board
<b>Amplifier Channels</b>	2
<b>Watts Per Channel (HF/LF) (W)</b>	12.5 x 2
<b>Digital Signal Processing</b>	No
<b>PSU Voltage Range</b>	9 - 24
<b>Audio Input</b>	Analog

---

**Primary Specifications**

**Digital Signal Processor Specifications**

**Dimensions & Weight**

**Power Supply Specifications**

