

Specification Sheet

Model # DC32WI



MISCO®

Key Features:

- 3.5" (87mm), 8 ohm
- Voice Range, 4 watts
- Ferrite magnet, red acrylic treated cloth cone;

Product Specifications & Parameters

Primary Specifications

Speakers Environment	Outdoor
RoHS Compliant	No

Technical Specifications

		Units of Measure
Nominal Basket Diameter	3.5	inch
	87.0	mm
Rated Impedance	8	ohms
Rated Power	4.0	Watts
Program Power	8	Watts
Frequency Range	270 - 6500	Hz
Sensitivity (2.83 V input measured at 1 Meter)	92	dB SPL
Voice Coil Diameter	0.7 / 17.8	inch / mm
Magnet Weight	2.4 / 68	oz / gr
Transformer		


Small Signal Parameters

		Units of Measure
Resonant Frequency (fo)	541	Hz
D.C. Resistance (Re)	6.0	ohms
Mechanical Q (Qms)	7.7	
Electrical Q (Qes)	7.02	
Total Q (Qts)	3.67	
Compliance Equivalent Volume (Vas)		ltr
BL Product (BL)		T-M
Maximum Linear Excursion (Xmax)	0.4	mm
Surface Area of Cone (Sd)		cm ²
Moving Mass (Mmd)		g

Material Descriptions

Basket	Stamped Steel
Terminal Size	0.19 X 0.02
Magnet	Ferrite
Voice Coil Wire	Copper
Voice Coil Form	Kapton
Cone	Red Acrylic Treated Cloth
Cone Edge	Red Acrylic Treated Cloth
Dust Cap	Felt

Sensitivity / Frequency

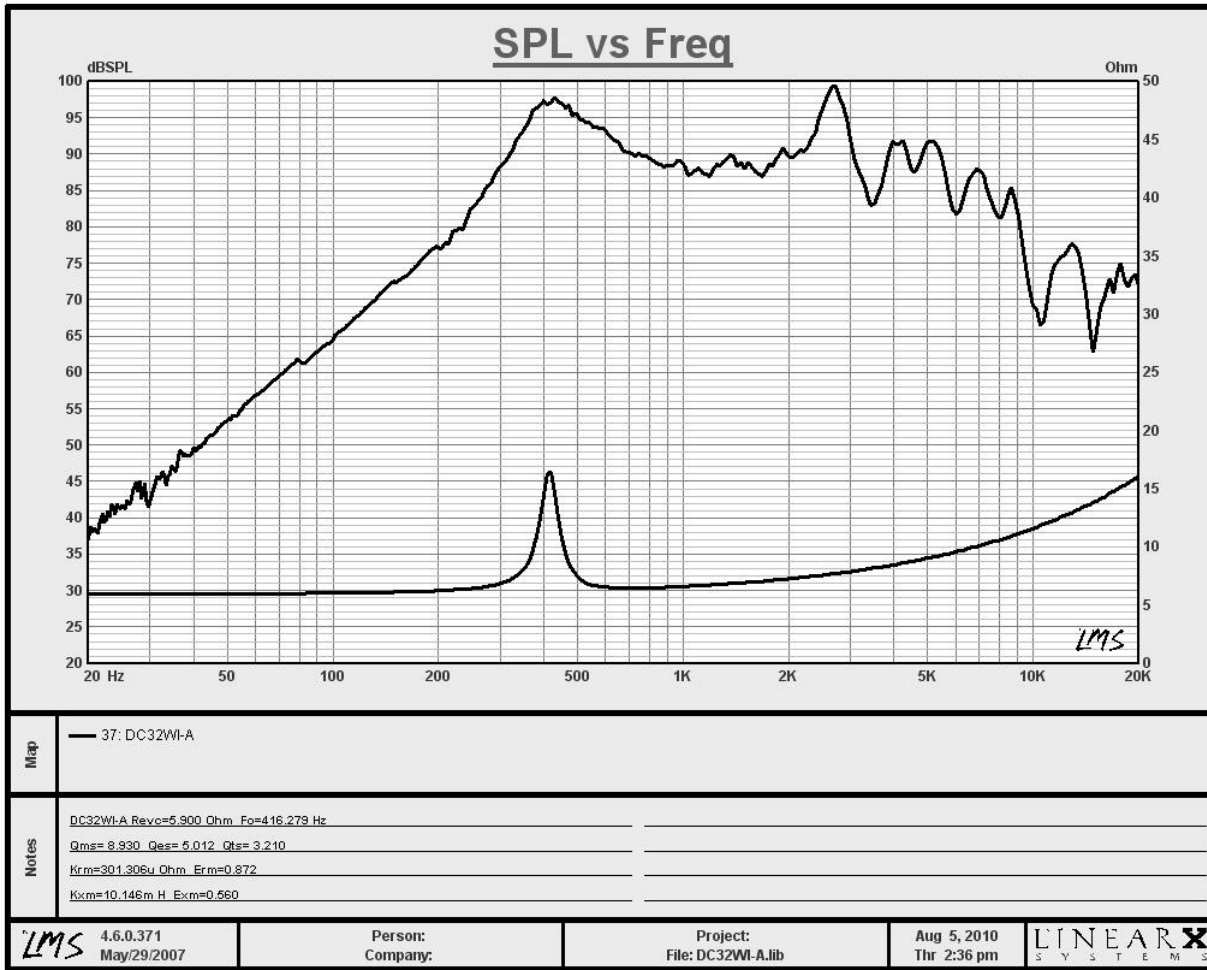

Drawing

ID	Description	Measurements	Tolerance
Od	Outside Diameter	3.5 in.	+/- 0.020"
CD	Cutout Diameter	3.1 in.	+/- 0.020"
MG	Magnet Diameter	2.1 in.	+/- 0.050"
HD	Hole Diameter	0.2 in.	+/- 0.010"
MD	Mounting Diameter	3.9 in.	+/- 0.010"
ID	Internal Depth	1.2 in.	+/- 0.025"
FT	Flange Thickness	0.1 in.	+/- 0.050"
NW	Net Weight	228.0 g	

